



Integrated Energy Aware Mechanism for MANETs using On-demand Routing

M.Tamilarasi

Dept. of ECE
Pondicherry Engineering College
Puducherry, India
e-mail : tamilarasim@pec.edu

Rajashekar Reddy. P

Patni Computers
Mumbai
India
e-mail: reddyprs@gmail.com

T.G.Palanivelu

Dept. of ECE
Pondicherry Engineering College
Puducherry, India
e-mail : tgp@rediffmail.com

Abstract— Mobile Ad Hoc Networks (MANETs) are energy constrained as nodes operate with limited battery power. In this paper, an integrated mechanism involving the load balancing approach and transmission power control approach is introduced to maximize the life-span of MANETs. As per the load balancing approach, routing protocols select a route at any time based on the remaining energy of the routes returned by Route Reply packets (RREPs). This is dependent on the available battery power and the energy requirement of nodes in the route to transmit the packets in output queue at that time. As per the transmission power control approach, once a route is selected, transmission power will be controlled on a link by link basis to reduce the power consumption. The mechanism is applied on Ad hoc On-demand Vector (AODV) protocol to make it as energy aware AODV (EA AODV). Simulations carried out using GloMoSim2.03 simulator show that the proposed mechanism reduces the required average transmission energy per packet by 25% compared to the standard AODV.

Keywords- energy aware routing; load balance; Mobile Ad Hoc Network; MANETs; on demand routing; transmission power.

I. INTRODUCTION

MANET is a temporary wireless network formed by a group of mobile nodes which may not be within the transmission range of each other. The nodes in MANET are self-organizing, self-configuring, self-maintaining and characterized by multi-hop wireless connectivity and frequently changing topology [1].

MANET usually consists of battery-operated computing devices which cooperate with each other to transmit packet from a source node to a destination node. The availability of each node is important for the enforcement of such cooperation. The failure of a single node can greatly affect the network performance. Since mobile nodes are usually battery-operated, one of the major reasons of node failure is battery exhaustion. In order to maximize the life-time of a mobile node, it is important to reduce the energy consumption of a node while transmitting packet.

There are many strategies proposed in literatures to minimize the required active communication energy. C. K. Toh [2] has proposed a conditional max-min battery capacity routing (CMMBCR) to choose a shortest path among all paths

in which every node has a battery capacity above a predefined threshold value in order to extend the lifetime of nodes in the network. Sheetal Kumar Doshi and Timothy X Brown [3] have applied minimum transmit power control on Dynamic Source Routing (DSR) protocol. For sensor networks, Frederick J. Block and Carl W. Baum [4] have presented a set of routing metrics that utilize an estimate of the remaining lifetime of each node. Qun Li et al [5] have developed few distributed power aware routing protocols for sensor networks. Mohammed Tarique et al [6] have applied transmission power control and load sharing approach in DSR in which the minimum energy of node in the discovered path to transmit power ratio has been used as the parameter for selecting a route. In our paper, the load balancing approach is based on the remaining energy at every node which is the resultant energy after deducting the required energy for transmitting packets in the queue from the available energy at every node. In this paper, we integrate the transmit power control and load balancing approach as a mechanism to improve the performance of on-demand routing. We applied this integrated mechanism on AODV to make it as Energy Aware AODV (EAAODV). The rest of the paper is organized as follows: Section II describes the load balancing approach and transmission power control approach applied on AODV to get EAAODV. Section III presents the simulation results and conclusions are given in Section IV.

II. EAAODV PROTOCOL

It is important to maximize the lifetime of power constrained MANETs by reducing the energy consumption of every node, as the nodes operate with limited battery power. Energy efficient routing is one among the many ways of efficient battery energy utilization. In this paper, we proposed an energy aware mechanism for on-demand protocols which is a combination of load balancing approach and transmission power control approach. As per the load balancing approach on-demand protocols select a route at any time based on the minimum energy availability of the routes at that time. As per the transmission power control approach once a route is selected, transmission power will be controlled on a link by link basis to reduce the power consumption per node. In this paper, energy aware approach is applied on AODV [7] to make it as Energy Aware AODV (EAAODV).

A. Overview of Route Discovery Mechanism in AODV

In AODV, a source node that wants to send a message to a destination for which it does not have a route broadcasts a Route Request (RREQ) packet to its neighbours. The RREQ contains the source node's address, broadcast ID, destination node's address and current sequence number as well as the destination node's most recent sequence number. All nodes receiving this packet update their information for the source node. A node that receives a RREQ can send a Route Reply (RREP) if it is either the destination or has a route to the destination with a corresponding sequence number greater than or equal to the sequence number that RREQ contains. In the latter case, the node returns a RREP to the source with an updated sequence number for that destination; otherwise, it rebroadcasts the RREQ. Nodes keep track of the RREQ source address and broadcast ID, discarding any RREQ they have already processed. As the RREPs propagate back to the source, nodes receiving these RREPs set up entries to the destination in their routing tables. The route is established once the source node receives the RREP [7].

B. Load balancing approach

Route discovery mechanism in EA AODV is illustrated in Fig 1 in which node 1 is the source and node 5 is the destination. Assume that all nodes have empty caches. At time t , when the source initiates a route discovery, the available energy levels of the nodes and their current required transmit power levels are as shown in Fig 1. The source initiates a route discovery by broadcasting the RREQ packet. Node 2 and node 4 are within the transmission range of node 1. Since intermediate nodes 2 and 4 are not the destination, these two nodes add their own node ids in the request packet and rebroadcast that RREQ. Once the destination 5 receives the RREQ packet, it sends a reply to the source by reversing the path through which it receives the RREQ packet.

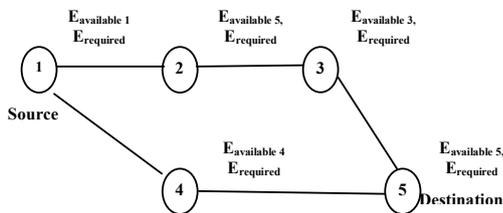


Figure 1. Routing In EA AODV

Let us assume that destination 5 replies back to the source using the route 5 – 3 – 2 – 1. When the intermediate node 3 receives the RREP packet it estimates its remaining battery energy using the available energy of node and the required transmit power of a packet at that node and let this value be 'x'. Node 3 records this value in that RREP packet and forwards the RREP to next hop towards source which is node 2. Node 2 estimates its remaining battery energy in the same way. Let us assume this value be 'y'. It also reads the value 'x' recorded in the RREP packet and compares 'x' with 'y'. Node 2 will replace 'x' by 'y' only if 'y' is less than 'x' or else, 'x'

will be retained in RREP. Let us assume that 'y' is less than 'x'. Thus the RREP carry the value of the minimum remaining battery energy 'y' of the path 1 – 2 – 3 – 5. So the source 1 records this path in the cache along with value 'y'. Let us assume that source 1 discovers another path 1–4–5 which has minimum battery energy of the path as 'z'. If 'y' is greater than 'z', the source then selects the path 1 –2–3–5 because that path has higher minimum battery energy than the shortest path 1–4–5. Thus, in EA AODV, the mobile nodes which are very likely to drain out batteries are avoided in the route discovery phase.

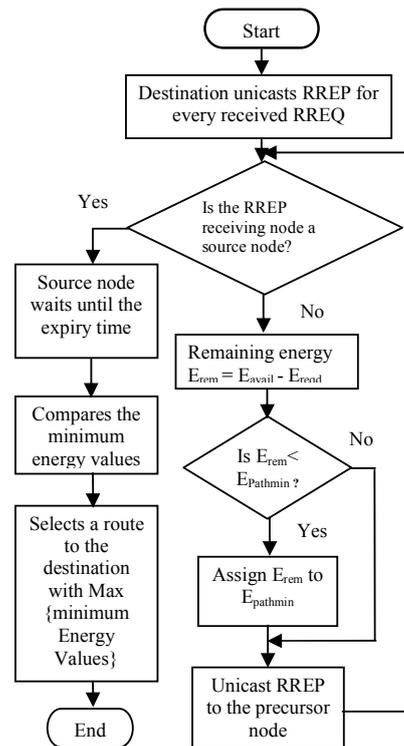


Figure 2. Flowchart for selecting the highest minimum energy route

The available energy level and the required transmit power level of a node are taken into account while making routing decision. The subtraction of current available energy levels and the required transmit power levels of nodes indicate how likely these nodes will deplete battery energy. In order to do that a source node finds a minimum energy route at time t such that the following cost function is maximized.

$$C(E, t) = \max \{E_{rem}\} \tag{1}$$

$$E_{rem} = E_{available}(t) - E_{required}(t) \tag{2}$$

Where, E_{rem} is the remaining energy of node, $E_{available}(t)$ is the available energy of node, $E_{required}(t)$ is the required transmit power of all packets in queue at the node. The energy required



in sending a data packet of size D bytes over a given link can be modeled as

$$E(D) = K1 D + K2 \quad (3)$$

$$K1 = (P_{i_packet} + P_{back}) \left(\frac{8}{BR} \right) \quad (4)$$

$$K2 = \left[(P_{i_MAC} D_{MAC} + P_{i_packet} D_{header}) \left(\frac{8}{BR} \right) \right] + E_{back} \quad (5)$$

Where, P_{back} and E_{back} are the background power and energy used up in sending the data packet, P_{i_MAC} is the power at which the MAC packets are transmitted, D_{MAC} is the size of the MAC packets in bytes, D_{header} is the size of the trailer and the header of the data packet, P_{i_packet} is the power at which the data packet is transmitted and BR is the transmission bit rate. Typical values of $K1$ and $K2$ in 802.11 MAC environments at 2Mbps bit rate are $4\mu s$ per bytes and $42\mu J$ respectively. Flow chart for load balancing approach is given in Figure 2.

C. Algorithm for Transmission Power Control Approach

Step 1: Transmit power is recorded in the data packet by every node lying along the route from source to destination and it is forwarded to the next node.

Step 2: When the next node receives that data packet at power P_{recv} , it reads the transmit power P_{tx} from the packet, and recalculates the minimum required transmit power P_{min} , for the precursor node.

$$P_{min} = (P_{tx} - P_{recv}) + P_{threshold} + P_{margin} \quad (6)$$

where $P_{threshold}$ is the required threshold power of the receiving node for successful reception of the packet. The typical value of $P_{threshold}$ in LAN 802.11 is 3.652^{-10} watt. To overcome the problem of unstable links due to channel fluctuations, a margin P_{margin} is included. Because the transmit power is monitored packet by packet, in our work, we maintain a margin of 1dBm.

Step 3: The recalculated minimum required transmission power, P_{min} is sent to the precursor node through acknowledgement (ACK).

Step 4: When the ACK packet is received by the precursor node, it records the modified transmit power in the power table and transmits the remaining packets with P_{min} .

Step 5: When a node can not find a record in the power table for a particular node, which will be the case when two nodes never exchanged packet before, it transmits with default power level of 250mW.

In MANETs using the energy aware on demand routing protocol, a source initiates route discovery mechanism every time, after a break period, when it wants to send packets for a destination. It selects a route based on the load balancing approach in order to balance the depletion of battery energy and applies the transmission power control approach while

transmitting the data packets. EA AODV integrates the load balancing approach and transmission power control approach.

III. PERFORMANCE EVALUATION

A. Simulation Scenario

The following scenario has been simulated in GloMoSim [8] simulator for comparing the performance of EAAODV with AODV. The total number of nodes participate in the network is fixed at 50 for the simulation. The nodes move inside a simulation area of (1500×300) m². The simulation time is kept at 900 seconds. The nodes move with a maximum velocity of 20m/s and in accordance with the random waypoint mobility model. In this model, a node randomly chooses a speed and a point in the simulation area for the next move. The speed is uniformly distributed between zero velocity and the maximal velocity. Subsequently, the node drives to the selected point at a constant speed. After arriving at the end point the node remains there for a certain time. Subsequently, the node repeats the operation by selecting a new end point and a new speed. The default transmit power is fixed at 15-dBm. The simulation is performed for three runs using different source destination pairs, with various number of CBR connections.

A. Performance Metrics

The following four key performance metrics are evaluated:

(i) *Capacity* is the total number of useful data packets reached the destination at the end of simulation. Capacity indicates the throughput of the network.

(ii) *End-to-End Delay* is the total delay that a packet experiences as it is travelling through the network. This delay is built up by several smaller delays in the network that adds together.

(iii) *Energy Consumption per packet* is the ratio of the total energy consumed by all nodes in the network to the number of packets successfully reached the destination.

(iv) *Average Energy Consumption per node* is the ratio of total energy consumed by all nodes in the network to the total number of nodes.

B. Performance Comparison of EA AODV and AODV

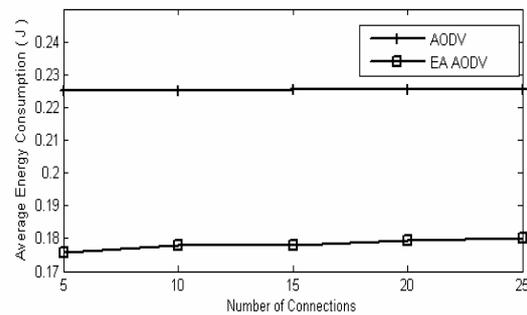


Figure 3. Average Energy Consumption per node

The average energy consumption per node has been evaluated as a function of traffic connections for comparing the performance of EAAODV with that of AODV. Traffic connection refers to the source-destination pair participating in communication.

From Fig 3 it is observed that EA AODV gives 21.10% less average energy consumption per node compared to the conventional AODV. This is mainly attributed to the energy aware approach.

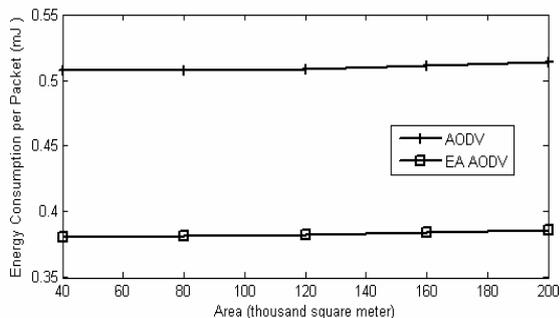


Figure 4. Energy Consumption per packet for varying terrain area.

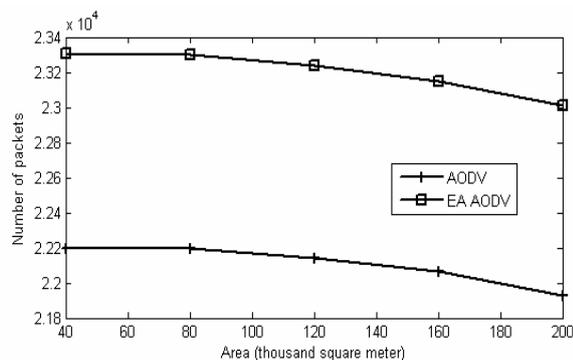


Figure 5. Total number of packets reached the destination as a function of terrain area.

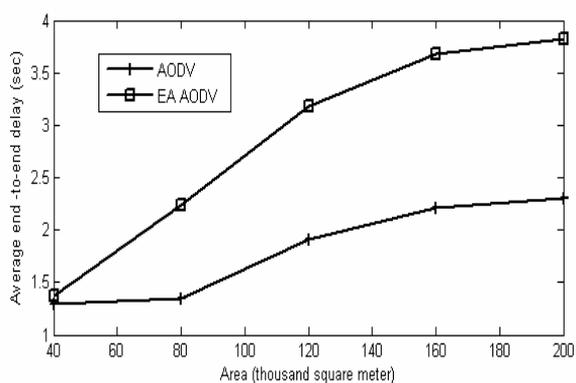


Figure 6. Average end-to-end delay as a function of terrain area.

The other three performance metrics listed in section B namely energy consumption per packet, capacity and average end-to-end delay have been evaluated as a function of varying terrain dimensions for comparing the performance of EAAODV with that of AODV. Number of source-destination pairs has been fixed as 25. From Fig.4 it is observed that energy consumption per packet of EA AODV is much less than that of AODV and it is also observed that energy consumption per packet of both AODV and EA AODV is increasing slightly as the terrain dimension is increasing. When the terrain area increases energy consumption per packet also increases, because packets may have to travel via many more hops in larger network area than the smaller area. It is observed from Fig.4 that the EA AODV protocol can save 25% of energy compared to standard AODV.

Fig 5 shows that the capacity of EA AODV in delivering packets successfully to destinations is higher compared to the basic AODV. The reason for the lower capacity of AODV is that more number of nodes being out of sufficient battery power during the simulation and hence they could neither forward any more packets to a destination, nor could they transmit their own packets. But in EA AODV, as the nodes have longer lives, they are capable of transmitting their own packets as well as forwarding packets of other sources, for a longer period of time.

The price being paid for the improved energy efficiency and capacity in EA AODV is shown in Fig 6 which reveals that the average end-to-end delay experienced by the packets is more in the case of EA AODV compared to AODV due to the inclusion of extra information such as remaining battery energy, packet transmission power in the packet header. This in turn changes the packet structure and increases the packet size. Moreover packets are not always sent via minimum hop path. Hence, average end-to-end delay is 5% higher in EAAODV compared to the standard AODV.

However, simulation results indicate that the application of energy aware mechanism on AODV improves its performance by reducing the per-node as well as per-packet energy consumption and increases the throughput.

IV. CONCLUSION

Energy management born out of limited battery capacity of wireless nodes is a challenge to be tackled in MANETs. In this paper, a mechanism is proposed for on-demand routing protocols in MANETs in order to maximize the lifetime of the network. This mechanism integrates two different approaches namely the load balancing approach and the transmission power control approach. The proposed load balancing approach uses the energy required to transmit the packets waiting in queue and the available battery energy at the node to find the remaining energy of the node. The mechanism applied on standard AODV resulted in EA AODV. From simulation results it is learnt that the EA AODV reduces on an average the energy consumption per node by 21.10%, the energy consumption per packet by 25% and increases the capacity by 5%. The price paid for the improvement in these performance parameters is the 5% increase in average end-to-end delay due to the inclusion of extra information in the packet header.



However, in this paper the energy aware mechanism is applied only on AODV, it could be applied for any on demand routing protocol to get energy efficiency with improved performance.

REFERENCES

- [1] Charles E.Perkins, "Ad Hoc Networking", Addison _Wesley Longman Publishing Co. Inc., 2001. ISBN: 0-201-30976-9.
- [2] C.K.Toh, "Maximum Battery Life Routing to Support Ubiquitous Mobile Computing in Wireless Ad Hoc Networks," *IEEE Communications Magazine*, pp 138-146, June 2001.
- [3] Sheetakumar Doshi, Timothy X Brown, "An On Demand Minimum Energy Routing Protocol for a Wireless Ad Hoc Networks," *Proc. ACM SIGMOBILE Mobile Computing and Communication Review*, Vol. 6, Issue.3, pp. 50-66, July 2002.
- [4] Frederick J. Block, Carl W.Baum, "Information for routing in energy-constrained ad hoc networks," *Ad Hoc Networks*, vol.4, pp 499-08,2006.
- [5] Qun Li, Javed Aslam, and Daniela Rus,"Distributed Energy-Conserving Routing Protocols," *proc. 36th Hawaii International Conference on System sciences, IEEE2002*.
- [6] Mohammed Tarique, Kemal E. Tepe, and Mohammed Naserian, "Energy Saving Dynamic Source Routing for Ad Hoc Wireless Networks," *IEEE international Conference on Modeling and Optimization in Mobile Ad hoc and Wireless Networks*, pp 305-310, December 2005.
- [7] C.E.Perkins, E.M.Royer, S.R.Das, "Ad hoc On-Demand Distance Vector (AODV) Routing," *Internet Draft, draft-ietf-manet-aodv-12.txt*,15,November2002.(Work in progress) Available: <http://www.ietf.org/internetdrafts/draft-ietf-manet-aodv-12.txt>
- [8] Jorge Nuevo, "A Comprehensible GloMoSim Tutorial," University of Quebec, September 2003.